


## QUADRI IN TECSEDO® SAFE QUADRO - Specifiche standard

(Le distanze possono essere adattate alle esigenze del cliente).

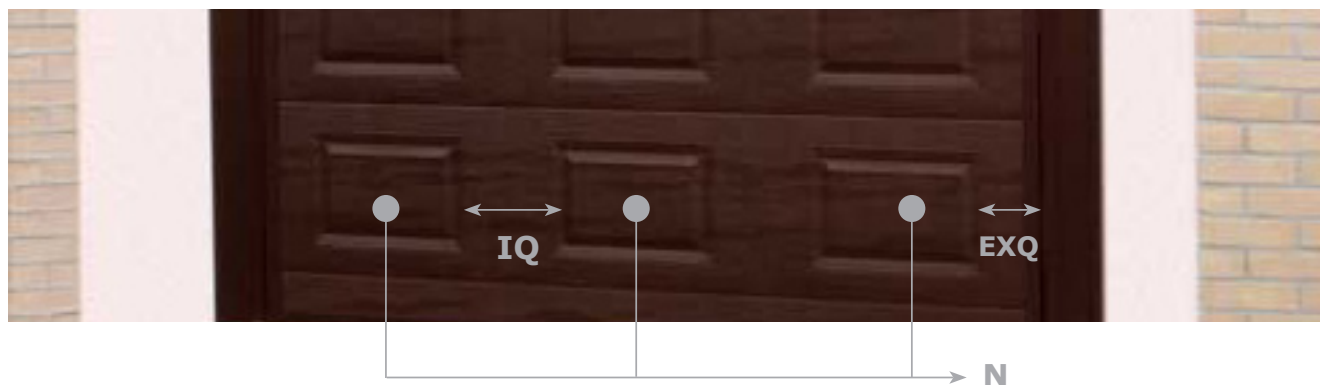

**Q**=Quadro    **IQ**=Interquadro    **EXQ**=Extraquadro    **N**=Numero di "Q" per pannello

### 2 < L < 3 m

L	2050	2250	2550	2600	2750	2850	2950
N	3	3	3	4	4	4	4
IQ	120	170	245	105	135	155	175
EXQ	145	195	270	130	160	180	200

### 3 < L < 4 m

L	3050	3150	3200	3250	3550	3750	3800	3950
N	4	4	5	5	5	5	6	6
IQ	195	125	103	111	161	194	101	123
EXQ	220	240	128	136	186	219	126	148

### 4 < L < 5 m

L	4050	4350	4400	4550	4950
N	6	6	7	7	7
IQ	137	180	100	119	169
EXQ	162	205	125	144	194

### 5 < L < 6 m

L	5050	5350	5550	5650
N	8	8	8	9
IQ	105	138	160	104
EXQ	130	163	185	129