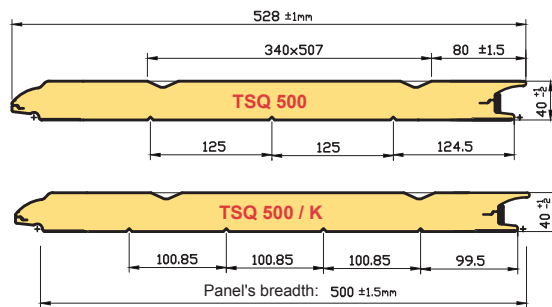


TSQ 500 & TSQ/K 500
TECSEDO® SAFE Quadro

 TSQ/K 500
WENGE - WOODGRAIN

 TSQ 500
GOLDEN OAK - WOODGRAIN


500 mm	Panel Weight:		
	WG	P25 & P5	4.85 Kg/m
	WG	PVC 140	4.90 Kg/m
	WG	P35	4.60 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	Ridges (K Version)		100 mm
	λ mW / m °C		<0.022
	K Watt / m °C		0.50
	I (ISO 717) Soundproof Index (dB)		25


40 mm

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.					
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 9006	Other RAL colours are available on request, subject to minimum quantities		
	35µm Polyester Multilayer		GBROWN	DBROWN					
UV Resistant 140µm PVC Film			GOLDEN OAK	DARK OAK	GREEN OAK	MAHOGANY	WENGE	WINCHESTER	ANTHRACITE
INTERNAL FACE	COLOURS			25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth	


TSQ 610 & TSQ/K 610
TECSEDO® SAFE Quadro

 TSQ/K 610
RAL 7016 - WOODGRAIN

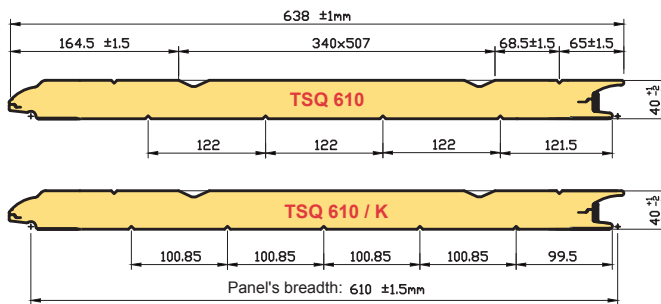 TSQ 610
RAL 9002 - WOODGRAIN


Panel Weight:	
WG P25 & P5	5.70 Kg/m
WG PVC 140	5.75 Kg/m
WG P35	5.40 Kg/m
Weight Tolerance	±5%
Ridges (Standard)	122 mm
Ridges (K Version)	101 mm
λ mW m °C	<0.022
K Watt m °C	0.50
I (ISO 717) Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.					
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 9006	Other RAL colours are available on request, subject to minimum quantities			
	35µm Polyester Multilayer		GBROWN	DBROWN					
UV Resistant 140µm PVC Film			GOLDEN OAK	DARK OAK	GREEN OAK	MAHOGANY	WENGE	WINCHESTER	ANTHRACITE
INTERNAL FACE	COLOURS		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth		