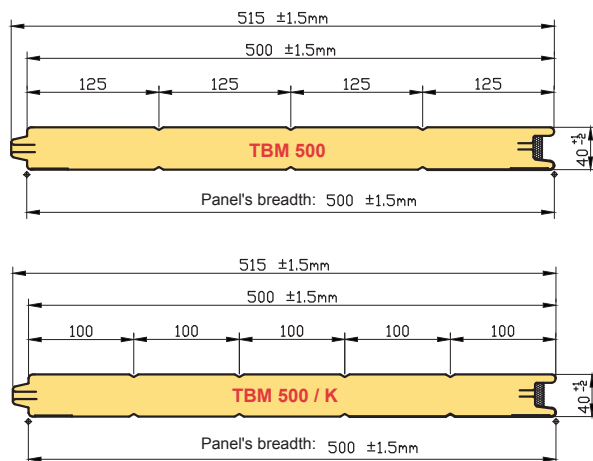


TBM 500 & TBM/K 500 40mm (STEEL)

TECSEDO® BASE Micro


Panel Weight	4.70 kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
λ mW / m °C	<0.022
K Watt / m °C	0.50
I (ISO 717)	25
Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.								
STUCCO	5µm Paintable Primer	STANDARD GREY	RAL 8014	RAL 9002	RAL 9010							
	25µm Polyester	STANDARD COLOURS	RAL 1021	RAL 3000	RAL 5010	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities
		OTHER COLOURS										
INTERNAL FACE	COLOURS	25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth						

TECSEDO reserves the right to make modifications or improvements to the products at any time and without prior notice, whenever they are necessary.


TBM 610 & TBM/K 610 40mm (STEEL)

TECSEDO® BASE Micro




TBM/K 610
RAL 9007 - STUCCO

TBM 610
RAL 9002 - STUCCO

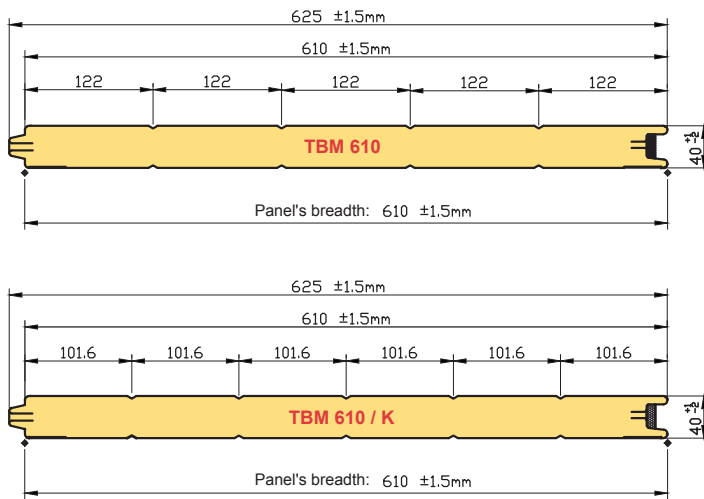

Panel Weight	5.60 kg/m
Weight Tolerance	±5%
Ridges (Standard)	122 mm
Ridges (K Version)	101 mm
λ mW / m °C	<0.022
K Watt / m °C	0.50
I (ISO 717) Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.											
STUCCO															
	5µm Paintable Primer		STANDARD GREY												
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010										
		OTHER COLOURS	RAL 3000	RAL 5010	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities					
		CORUS SCALE	MERLIN GREY	GOOSEWING GREY	ALBATROS	OCEAN BLUE	SOLENT BLUE	SARGASSO BLUE	JUNIPER GREEN	HERITAGE GREEN	OLIVE GREEN (RAL 6003)	MOORLAND GREEN	POPPY RED	AZTEC YELLOW	
INTERNAL FACE	COLOURS		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth								