


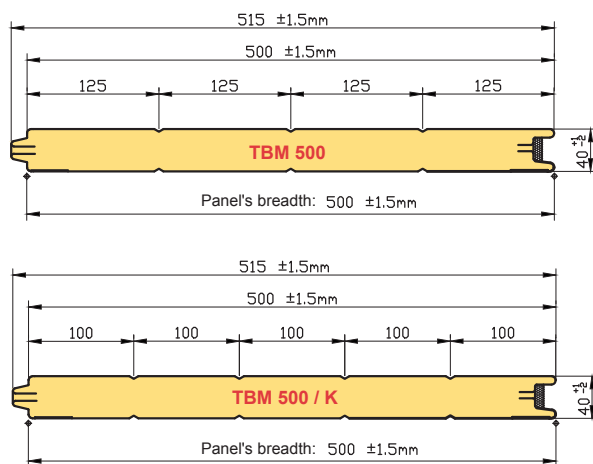

**TBM A 500 & TBM/K A 500 40mm (ALUMINIUM) TECSEDO® BASE Micro**


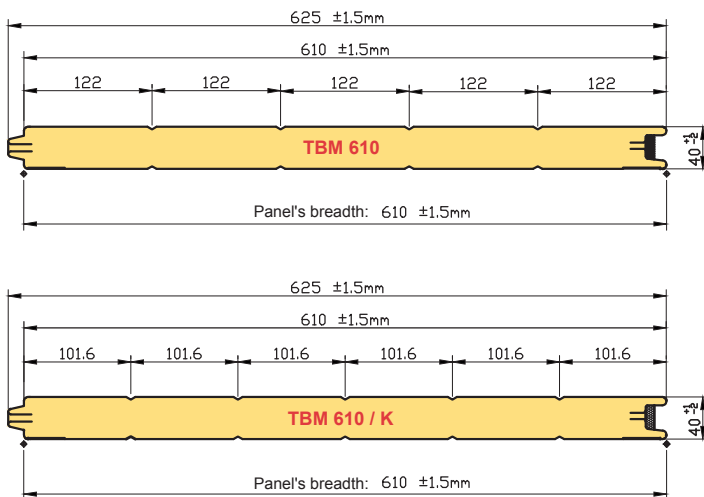
Panel Weight	2.85 kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
$\lambda$ $\frac{mW}{m^2 \cdot ^\circ C}$	<0.022
K $\frac{Watt}{m^2 \cdot ^\circ C}$	0.50
I (ISO 717)	
Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	
<b>STUCCO</b>				
	Standard of Mill	ALUMINIUM	NATURAL	
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	<b>NATURAL Stucco</b> 

\* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.


**TBM A 610 & TBM/K A 610 40mm (ALUMINIUM) TECSEDO® BASE Micro**



Panel Weight	3.30 kg/m
Weight Tolerance	±5%
Ridges (Standard)	122 mm
Ridges (K Version)	101 mm
$\lambda$ $\frac{mW}{m^{\circ}C}$	<0.022
K $\frac{Watt}{m^{\circ}C}$	0.50
I (ISO 717) Soundproof Index (dB)	25

610 mm  
40 mm

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.
<b>STUCCO</b>				
	Standard of Mill	ALUMINIUM	NATURAL	
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	<b>NATURAL Stucco</b> 