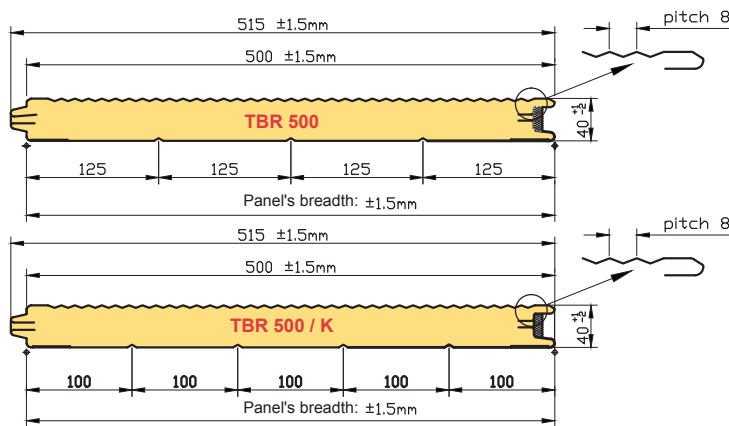
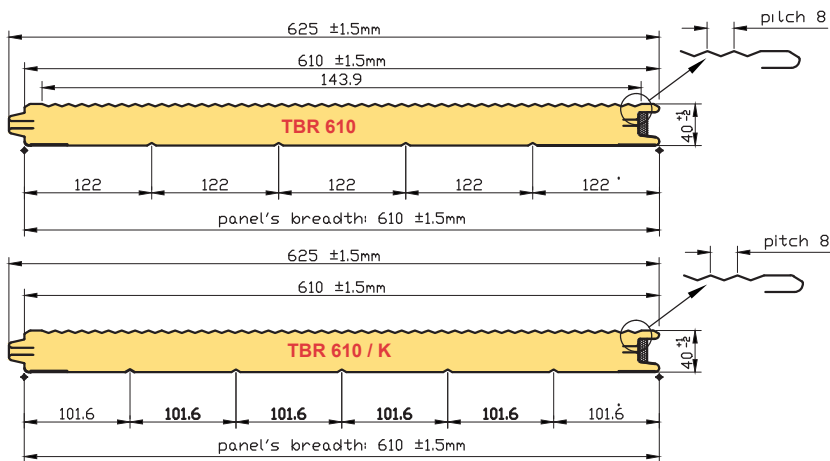
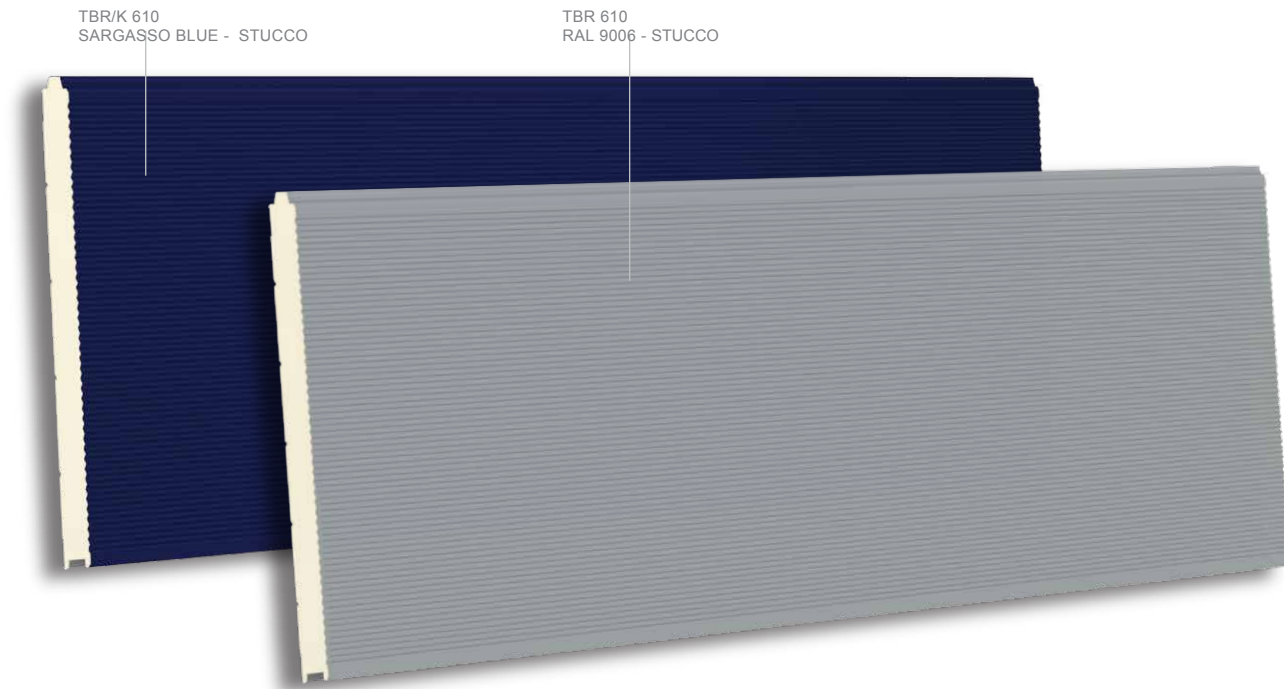


**TBR 500 & TBR/K 500**
**TECSEDO® BASE Rake**


500 mm	Panel Weight:		
	ST SM	P25 & P5	4.70 kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	Ridges (K Version)		100 mm
	λ mW m °C		<0.022
	K Watt m °C		0.50
40 mm	I (ISO 717)		25
	Soundproof Index (dB)		

Panel weight is for indication purposes only. Due to the typical tolerances gotten during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face								* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
<b>STUCCO</b>												
	5µm Paintable Primer		STANDARD GREY									
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010							
OTHER COLOURS		RAL 1021	RAL 3000	RAL 5010	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
<b>SMOOTH</b>												
	25µm Polyester		RAL 7016	RAL 9002	RAL 9006	RAL 9007	RAL 9010					
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth	

**TBR 610 & TBR/K 610**
**TECSEDO® BASE Rake**


610 mm	Panel Weight:		
	ST SM	P25 & P5	5.60 kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		122 mm
	Ridges (K Version)		101 mm
	mW		<0.022
	λ	m °C	
	K	Watt	0.50
		m °C	
	I (ISO 717)		25
	Soundproof Index (dB)		
		40 mm	

Panel weight is for indication purposes only. Due to the typical tolerances gotten during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING	COATING	TYPE	COLOURS*										
External Face	External Face	External Face	External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.									
<b>STUCCO</b>													
	5µm Paintable Primer	STANDARD GREY											
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010								
		OTHER COLOURS	RAL 3000	RAL 5010	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
		CORUS SCALE	MERLIN GREY	GOOSEWING GREY	ALBATROS	OCEAN BLUE	SOLENT BLUE	SARGASSO BLUE	JUNIPER GREEN	HERITAGE GREEN	OLIVE GREEN (RAL 6003)	MOORLAND GREEN	POPPY RED
<b>SMOOTH</b>													
	25µm Polyester		RAL 7016	RAL 9002	RAL 9006	RAL 9007	RAL 9010						
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	RAL 9002	RAL 9010	RAL 9002	RAL 9010						
			Stucco	Stucco	Stucco	Smooth	Smooth						