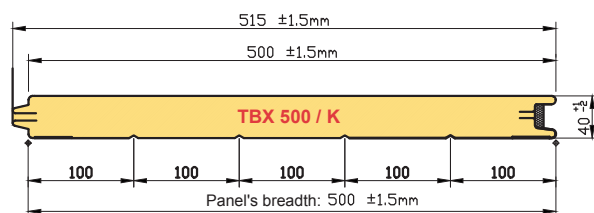
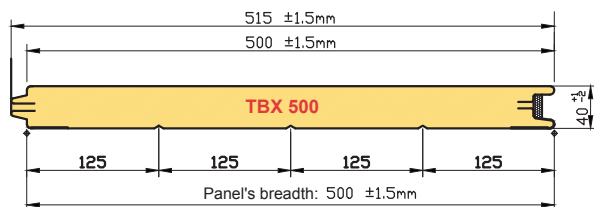



**TBX 500 & TBX/K 500**
**TECSEDO® BASE eXtra**


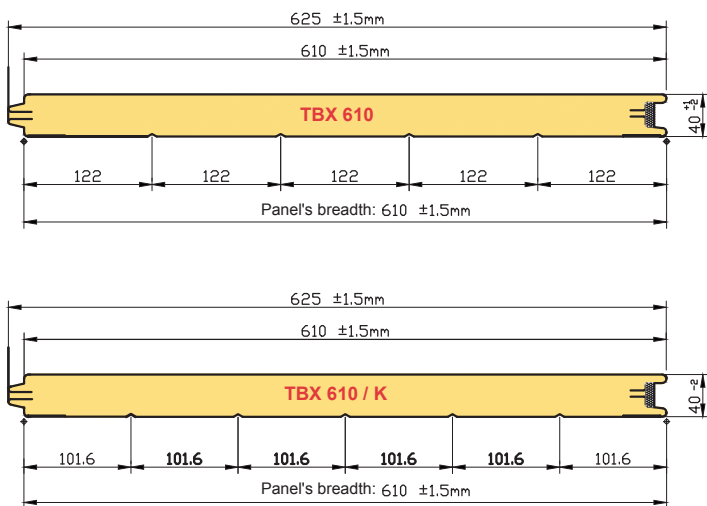
Panel Weight	4.70 kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
$\lambda$ $\frac{mW}{m^{\circ}C}$	<0.022
$K$ $\frac{Watt}{m^{\circ}C}$	0.50
I (ISO 717)	
Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.									
<b>STUCCO</b>													
	5µm Paintable Primer		STANDARD GREY										
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010								
		OTHER COLOURS	RAL 1021	RAL 3000	RAL 5010	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth						


**TBX 610 & TBX/K 610**

**TECSEDO® BASE eXtra**



Panel Weight	5.60 kg/m
Weight Tolerance	±5%
Ridges (Standard)	122 mm
Ridges (K Version)	101 mm
$\lambda$ mW / m °C	<0.022
K Watt / m °C	0.50
I (ISO 717) Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.														
<b>STUCCO</b>																		
	5µm Paintable Primer		STANDARD GREY															
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010													
		OTHER COLOURS	RAL 3000	RAL 5010	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities								
		CORUS SCALE	MERLIN GREY	GOOSEWING GREY	ALBATROS	OCEAN BLUE	SOLENT BLUE	SARGASSO BLUE	JUNIPER GREEN	HERITAGE GREEN	OLIVE GREEN (RAL 6003)	MOORLAND GREEN	POPPY RED	AZTEC YELLOW				
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth											