






TSD 500
V-WINCHESTER - SMOOTH

TSD 500
RAL 9010 - WOODGRAIN

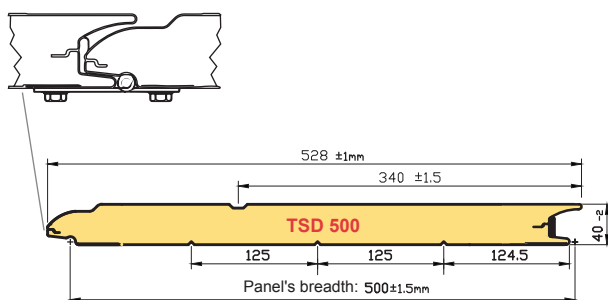



500 mm	Panel Weight:		
	WG	P25 & P5	4.60 Kg/m
	POLY	POLY 25	5.00 Kg/m
	WG SM	P45 & P35 SAND	4.85 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	λ $\frac{mW}{m °C}$		
40 mm	κ $\frac{Watt}{m °C}$		0.50
	I (ISO 717)		25
	Soundproof Index (dB)		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecse^{do} recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*							* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN											
	5µm Paintable Primer		STANDARD GREY								
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
POLYGRAIN											
	25µm Polyammidic		RAL 7016	RAL 9016							
SANDGRAIN											
	35µm Super Polyester Wrinkled		RAL 7016								
SMOOTH											
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth			



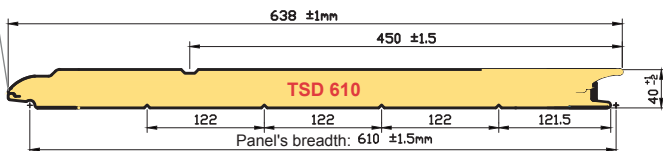


TSD 610
V-MAHOGANY - SMOOTH

TSD 610
RAL 9002- WOODGRAIN





610 mm	Panel Weight:		
	WG	P25 & P5	5.45 Kg/m
	POLY	POLY 25	5.95 Kg/m
	WG SM	P45 & P35 SAND	5.75 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		122 mm
	$\lambda \frac{mW}{m^{\circ}C}$		<0.022
40 mm	$k \frac{Watt}{m^{\circ}C}$		0.50
	I (ISO 717)		25
	Soundproof Index (dB)		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER	
POLYGRAIN									
	25µm Polyammidic		RAL 7016	RAL 9016					
SANDGRAIN									
	35µm Super Polyester Wrinkled		RAL 7016						
SMOOTH									
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth



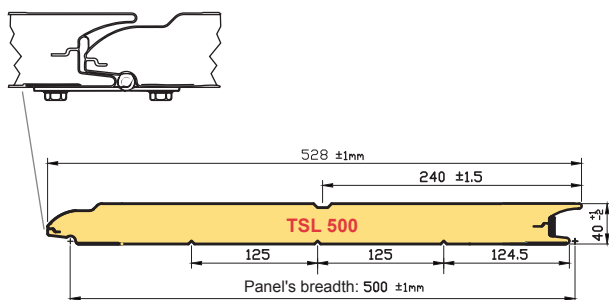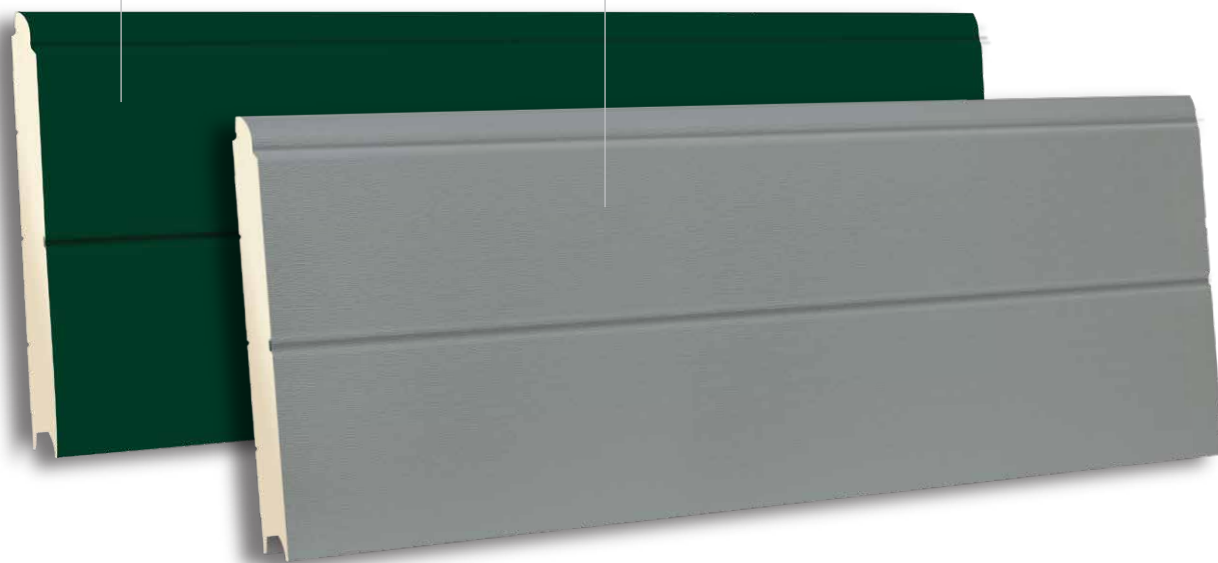


TSL 500
RAL 6009 - WOODGRAIN

TSL 500
RAL 9006 - WOODGRAIN




500 mm	Panel Weight:		
	WG	P25 & P5	4.60 Kg/m
	POLY	POLY 25	5.00 Kg/m
	WG SM	P45 & P35 SAND	4.85 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	λ $\frac{mW}{m^2 \cdot ^\circ C}$		
40 mm	κ $\frac{Watt}{m^2 \cdot ^\circ C}$		0.50
	I (ISO 717)		25
	Soundproof Index (dB)		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*		* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.			
WOODGRAIN											
	5µm Paintable Primer			STANDARD GREY							
	25µm Polyester	STANDARD COLOURS		RAL 8014	RAL 9002	RAL 9010					
		OTHER COLOURS		RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
POLYGRAIN											
	25µm Polyammidic			RAL 7016		RAL 9016					
SANDGRAIN											
	35µm Super Polyester Wrinkled			RAL 7016							
SMOOTH											
	45 µm Super Polyester Multilayer HD+			V-GOLDEN		V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS		25µm Polyester				RAL 9010 Stucco		RAL 9002 Smooth	RAL 9010 Smooth	

TSL 610
V-MAHOGANY - SMOOTH

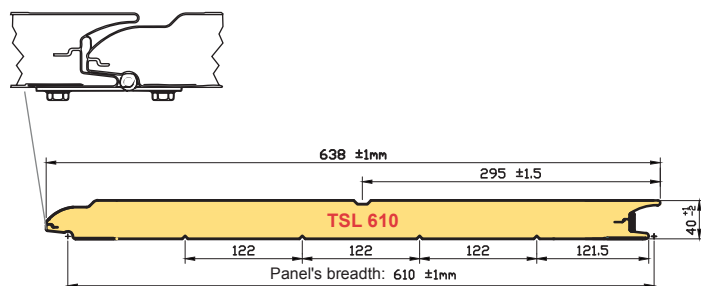






TSL 610
RAL 9010- WOODGRAIN



Panel Weight:		
WG	P25 & P5	5.45 Kg/m
POLY	POLY 25	5.95 Kg/m
WG SM	P45 & P35 SAND	5.75 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		122 mm
$\lambda \frac{mW}{m^2 \cdot ^\circ C}$		<0.022
$k \frac{Watt}{m^2 \cdot ^\circ C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

40 mm

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.				
WOODGRAIN												
	5µm Paintable Primer		STANDARD GREY									
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010							
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities				
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER					
POLYGRAIN												
	25µm Polyammidic		RAL 7016	RAL 9016								
SANDGRAIN												
	35µm Super Polyester Wrinkled		RAL 7016									
SMOOTH												
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER					
INTERNAL FACE	COLOURS		25µm Polyester			RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth


TSM 500
RAL 9010 - STUCCO

TSM/K 500
V-GOLDEN - WOODGRAIN



Panel Weight:		
ST WG	P25 & P5	4.60 Kg/m
POLY	POLY 25	5.00 Kg/m
WG SM	P45 & P35 SAND	4.85 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
Ridges (K Version)		100 mm
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$K \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

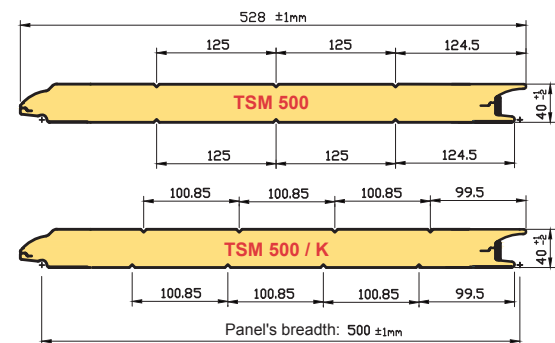

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*		* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.					
STUCCO										
	5µm Paintable Primer		STANDARD GREY							
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010					
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
WOODGRAIN										
	5µm Paintable Primer		STANDARD GREY							
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010					
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 9006	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
POLYGRAIN										
	25µm Polyammidic		RAL 7016	RAL 9016						
SANDGRAIN										
	35µm Super Polyester Wrinkled		RAL 7016							
SMOOTH										
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
INTERNAL FACE	COLOURS			25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth		


TSM 610
RAL 9010 - STUCCO

TSM/K 610
RAL 7016 - SANDGRAIN



Panel Weight:		
ST WG	P25 & P5	5.45 Kg/m
POLY	POLY 25	5.95 Kg/m
WG SM	P45 & P35 SAND	5.75 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		122 mm
Ridges (K Version)		101 mm
λ	$\frac{mW}{m^{\circ}C}$	<0.022
k	$\frac{Watt}{m^{\circ}C}$	0.50
I (ISO 717)		25
Soundproof Index (dB)		


Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

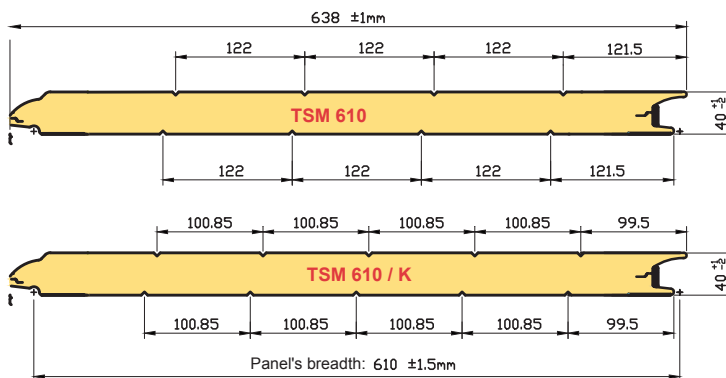

FINISHING		COATING	TYPE	COLOURS*						
External Face		External Face	External Face	External Face						
STUCCO										
	5µm Paintable Primer		STANDARD GREY							
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010					
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
WOODGRAIN										
	5µm Paintable Primer		STANDARD GREY							
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010					
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 9006	Other RAL colours are available on request, subject to minimum quantities				
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
POLYGRAIN										
	25µm Polyammidic		RAL 7016	RAL 9016						
SANDGRAIN										
	35µm Super Polyester Wrinkled		RAL 7016							
SMOOTH										
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
INTERNAL FACE	COLOURS			25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth	


TSQ/K 500
V-MAHOAGANY- WOODGRAIN

TSQ 500
V-GOLDEN - WOODGRAIN

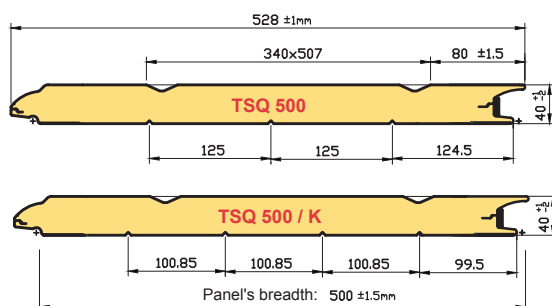


500 mm	Panel Weight:	
	WG	P25 & P5
	WG	P45
	Weight Tolerance	
	Ridges (Standard)	
	Ridges (K Version)	
	λ $\frac{mW}{m^{\circ}C}$	
40 mm	κ $\frac{Watt}{m^{\circ}C}$	
	I (ISO 717)	
	Soundproof Index (dB)	

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*		* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.									
WOODGRAIN																	
	5µm Paintable Primer			STANDARD GREY													
	25µm Polyester	STANDARD COLOURS		RAL 8014		RAL 9002		RAL 9010									
		OTHER COLOURS		RAL 6005		RAL 6009		RAL 7016		RAL 8017		RAL 9006		RAL 9007		Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+					V-GOLDEN		V-DARK		V-WENGÉ		V-MAHOAGANY		V-WINCHESTER			
INTERNAL FACE		COLOURS		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth					


TSQ/K 610
RAL 7016 - WOODGRAIN



TSQ 610
RAL 9002 - WOODGRAIN

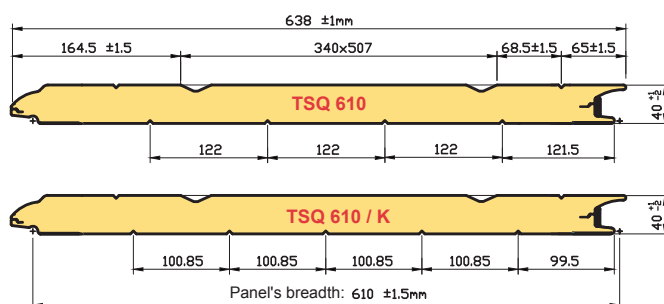

Panel Weight:		
WG	P25 & P5	5.45 Kg/m
WG	P45	5.75 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		122 mm
Ridges (K Version)		101 mm
λ	mW m °C	<0.022
K	Watt m °C	0.50
I (ISO 717) Soundproof Index (dB)		25



Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

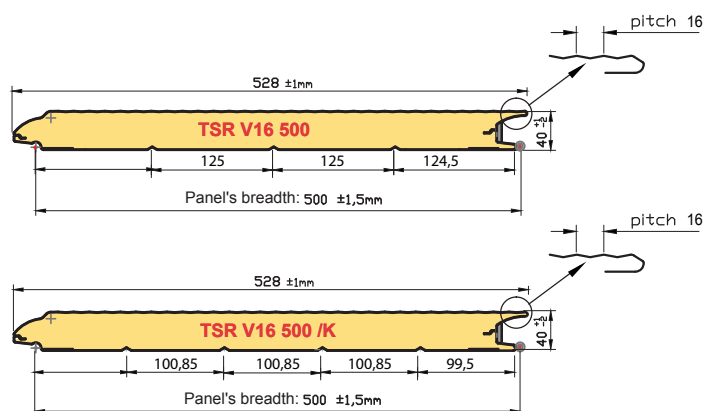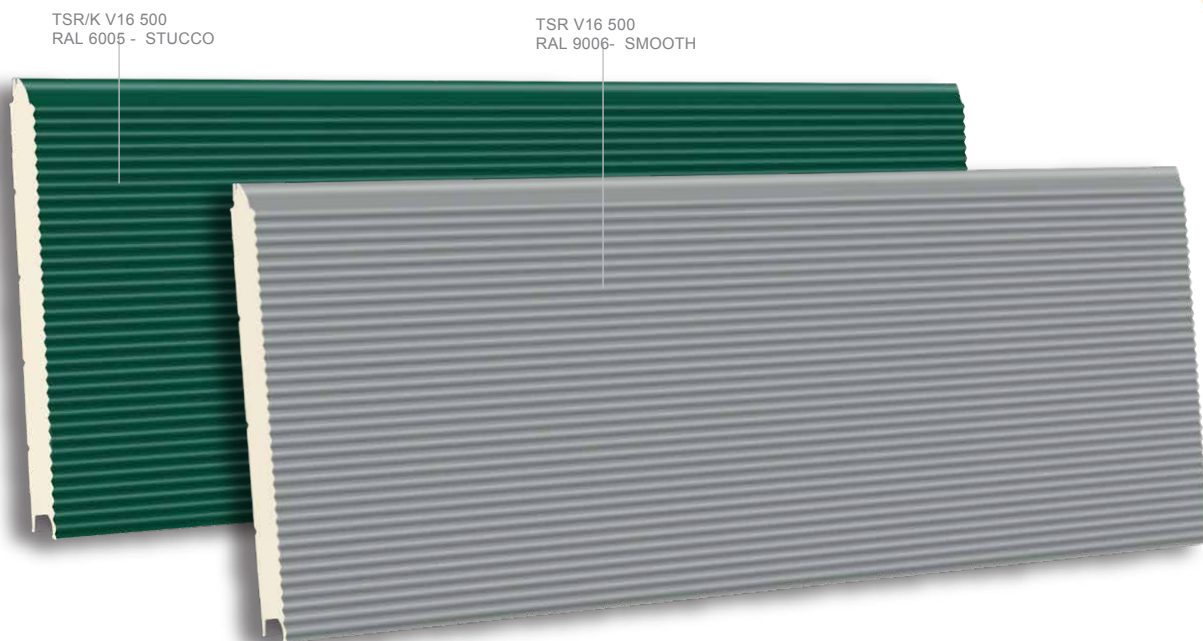FINISHING External Face	COATING External Face	TYPE External Face	COLOURS External Face						* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.		
WOODGRAIN											
	5µm Paintable Primer		STANDARD GREY								
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS			25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth	RAL 9010 Smooth



Panel Weight:	4.60 Kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
$\lambda \frac{mW}{m^2 \cdot ^\circ C}$	<0.022
$\kappa \frac{Watt}{m^2 \cdot ^\circ C}$	0.50
I (ISO 717)	25
Soundproof Index (dB)	


Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.				
STUCCO												
	5µm Paintable Primer		STANDARD COLOURS									
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010							
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
SMOOTH												
	25µm Polyester			RAL 1013	RAL 7016	RAL 7035	RAL 9002	RAL 9006	RAL 9007	RAL 9010	For other models and colors, please contact us	
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth	

V8








TSR/K V8 500
RAL 9007 - STUCCO

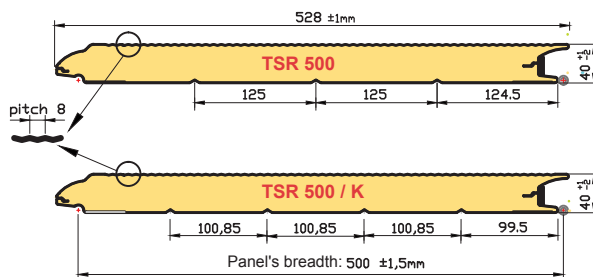TSR V8 500
RAL 9002 - SMOOTH



500 mm	Panel Weight:	
	ST SM P25 & P5	4.60 Kg/m
	Weight Tolerance	±5%
	Ridges (Standard)	125 mm
	Ridges (K Version)	100 mm
	λ mW m °C	<0.022
	κ Watt m °C	0.50
	I (ISO 717) Soundproof Index (dB)	25
40 mm		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*				* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.							
STUCCO																	
	5µm Paintable Primer			STANDARD COLOURS													
	25µm Polyester	STANDARD COLOURS	RAL 8014		RAL 9002		RAL 9010										
			OTHER COLOURS	RAL 6005		RAL 6009		RAL 7016		RAL 8017		RAL 9006		RAL 9007		Other RAL colours are available on request, subject to minimum quantities	
SMOOTH																	
	25µm Polyester		RAL 1013		RAL 7016		RAL 7035		RAL 9002		RAL 9006		RAL 9007		RAL 9010		For other models and colors, please contact us
INTERNAL FACE		COLOURS			25µm Polyester												

TSR V16 555
TSR/K V16 555 **TECSEIDO®** **SAFE Rake**


TSR/K V16 555
RAL 8017- STUCCO

TSR V16 555
RAL 9010 - SMOOTH

V16


Panel Weight:	
ST LI P25	5.03 Kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
$\lambda \frac{mW}{m^2 \cdot ^\circ C}$	<0.022
$K \frac{Watt}{m^2 \cdot ^\circ C}$	0.50
I (ISO 717)	25
Soundproof Index (dB)	

40 mm

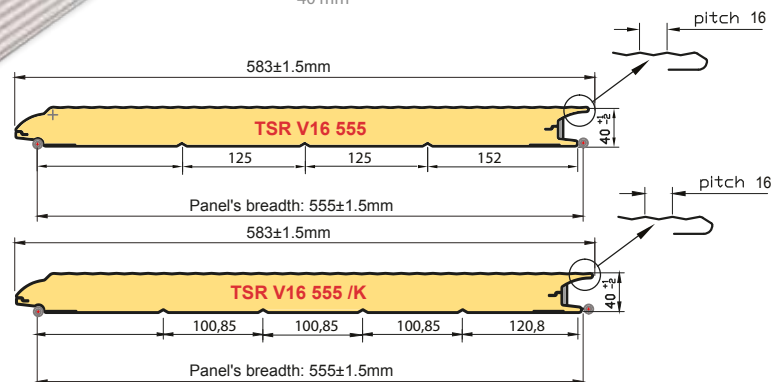



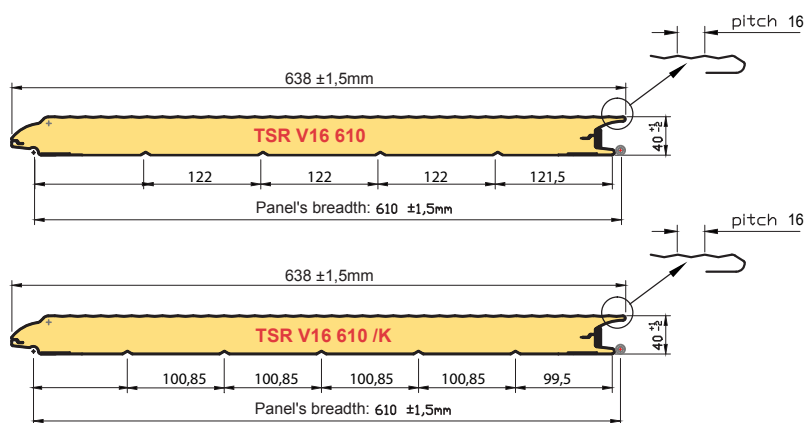

V16



Panel Weight:	5.45 Kg/m
Weight Tolerance	±5%
Ridges (Standard)	122 mm
Ridges (K Version)	101 mm
$\lambda \frac{mW}{m^2 \cdot ^\circ C}$	<0.022
$K \frac{Watt}{m^2 \cdot ^\circ C}$	0.50
I (ISO 717)	25
Soundproof Index (dB)	


Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*			* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.		
STUCCO								
	5µm Paintable Primer		STANDARD GREY					
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010			
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities
SMOOTH								
	25µm Polyester		RAL 7016	RAL 9002	RAL 9006	RAL 9007	RAL 9010	For other models and colors, please contact us
INTERNAL FACE	COLOURS			25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth

V8

TSR/K V8 610
RAL 6005 - STUCCO

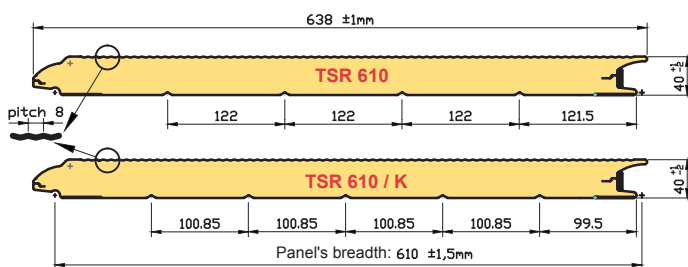

TSR V8 610
RAL 9010 - SMOOTH



610 mm	Panel Weight:	
	ST SM P25 & P5	5.45 Kg/m
	Weight Tolerance	±5%
	Ridges (Standard)	122 mm
	Ridges (K Version)	101 mm
	λ mW m °C	<0.022
	K Watt m °C	0.50
40 mm	I (ISO 717)	25
	Soundproof Index (dB)	


Panel weight is for indication purposes only.

Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
STUCCO									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
			RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
		OTHER COLOURS							
SMOOTH									
	25µm Polyester		RAL 7016	RAL 9002	RAL 9006	RAL 9007	RAL 9010	For other models and colors, please contact us	
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth	



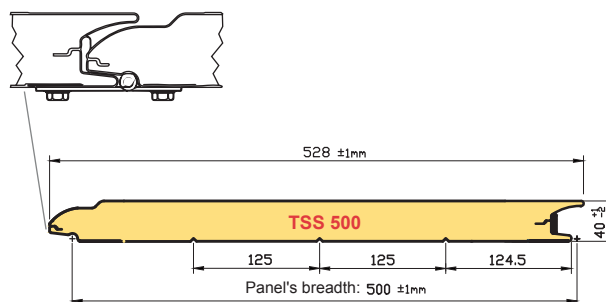





TSS 500
V-GOLDEN - WOODGRAIN

TSS 500
RAL 9016 - POLYGRAIN





500 mm	Panel Weight:		
	WG	P25 & P5	4.60 Kg/m
	POLY	POLY 25	5.00 Kg/m
	WG SM	P45 & P35 SAND	4.85 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	λ $\frac{mW}{m^{\circ}C}$		<0.022
40 mm	κ $\frac{Watt}{m^{\circ}C}$		0.50
	I (ISO 717)		25
	Soundproof Index (dB)		

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*							* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN											
	5µm Paintable Primer		STANDARD GREY								
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
POLYGRAIN											
	25µm Polyammidic			RAL 7016	RAL 9016						
SANDGRAIN											
	35µm Super Polyester Wrinkled			RAL 7016							
SMOOTH											
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
INTERNAL FACE	COLOURS		25µm Polyester								

TSS 610
RAL 8014 - WOODGRAIN

TSS 610
RAL 9002- WOODGRAIN

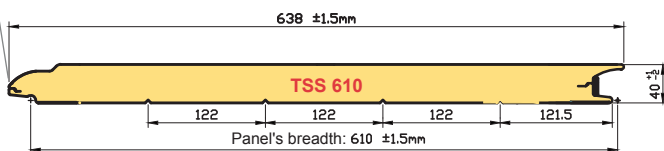





610 mm	Panel Weight:		
	WG	P25 & P5	5.45 Kg/m
	POLY	POLY 25	5.95 Kg/m
	WG SM	P45 & P35 SAND	5.75 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		122 mm
	$\lambda \frac{mW}{m^2 \cdot ^\circ C}$		<0.022
40 mm	$K \frac{Watt}{m^2 \cdot ^\circ C}$		0.50
	I (ISO 717)		25
	Soundproof Index (dB)		

40 mm


Panel weight is for indication purposes only.

Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
POLYGRAIN									
	25µm Polyammidic		RAL 7016	RAL 9016					
SANDGRAIN									
	35µm Super Polyester Wrinkled		RAL 7016						
SMOOTH									
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth	

TST/K 500
V-DARK - SMOOTH



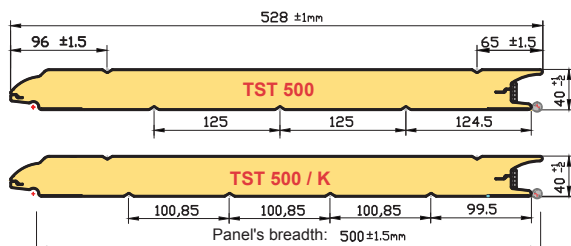

TST 500
9002 - WOODGRAIN



Panel Weight:		
WG	P25 & P5	4.60 Kg/m
POLY	POLY 25	5.00 Kg/m
WG SM	P45 & P35 SAND	4.85 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
λ	$\frac{mW}{m^{\circ}C}$	<0.022
κ	$\frac{Watt}{m^{\circ}C}$	0.50
I (ISO 717)		25
Soundproof Index (dB)		


40 mm

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*								* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN												
	5µm Paintable Primer		STANDARD GREY									
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010							
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
POLYGRAIN												
	25µm Polyammidic			RAL 7016	RAL 9016							
SANDGRAIN												
	35µm Super Polyester Wrinkled			RAL 7016								
SMOOTH												
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth	

TST/K 610
PRIMER, STANDARD GREY - WOODGRAIN



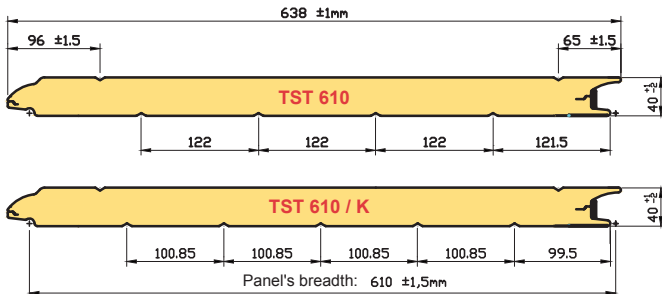

TST 610
RAL 9010 - WOODGRAIN



Panel Weight:		
WG	P25 & P5	5.45 Kg/m
POLY	POLY 25	5.95 Kg/m
WG SM	P45 & P35 SAND	5.75 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		122 mm
$\lambda \frac{mW}{m^2 \cdot ^\circ C}$		<0.022
$k \frac{Watt}{m^2 \cdot ^\circ C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		


Panel weight is for indication purposes only.

Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER	
POLYGRAIN									
	25µm Polyamidic		RAL 7016	RAL 9016					
SANDGRAIN									
	35µm Super Polyester Wrinkled		RAL 7016						
SMOOTH									
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS			25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth



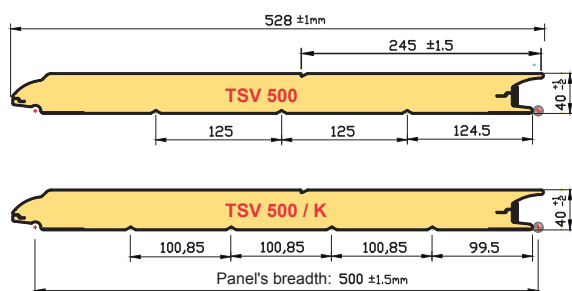


TSV/K 500
V-DARK - WOODGRAIN

TSV 500
RAL 9006 - WOODGRAIN



Panel Weight:		
WG	P25 & P5	4.60 Kg/m
POLY	POLY 25	5.00 Kg/m
WG SM	P45 & P35 SAND	4.85 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
Ridges (K Version)		100 mm
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$k \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.


FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*							* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN											
	5µm Paintable Primer		STANDARD GREY								
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
POLYGRAIN											
	25µm Polyammidic			RAL 7016	RAL 9016						
SANDGRAIN											
	35µm Super Polyester Wrinkled			RAL 7016							
SMOOTH											
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER			
INTERNAL FACE	COLOURS		25µm Polyester					RAL 9010 Stucco		RAL 9002 Smooth	
								RAL 9010 Smooth			

TSV 555
TSV/K 555

TECSEDO® SAFE eVo




Panel Weight:		
WG	P25	5.03 Kg/m
POLY	POLY 25	5.45 Kg/m
WG	P35	4.75 Kg/m
LI	P35	5.30 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
Ridges (K Version)		100 mm
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$K \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

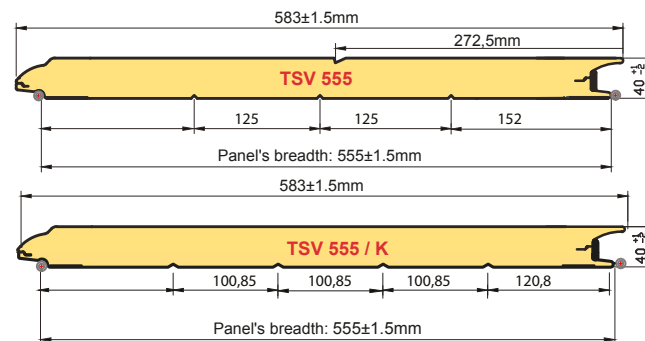



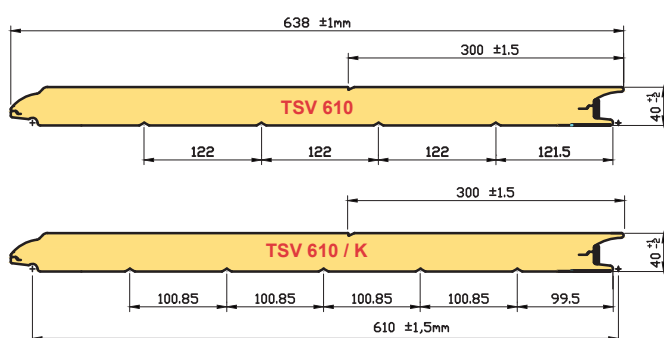





TSV/K 610
V-WINCHESTER - SMOOTH

TSV 610
RAL 9010 - WOODGRAIN




Panel Weight:		
WG	P25 & P5	5.45 Kg/m
POLY	POLY 25	5.95 Kg/m
WG SM	P45 & P35 SAND	5.75 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		122 mm
Ridges (K Version)		101 mm
$\frac{mW}{\lambda \text{ m } ^\circ\text{C}}$		<0.022
$\kappa \frac{\text{Watt}}{\text{m } ^\circ\text{C}}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS*						* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities	
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY		V-WINCHESTER
POLYGRAIN									
	25µm Polyamidic		RAL 7016	RAL 9016					
SANDGRAIN									
	35µm Super Polyester Wrinkled		RAL 7016						
SMOOTH									
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS		25µm Polyester						

TSX/K 500
V-DARK - WOODGRAIN



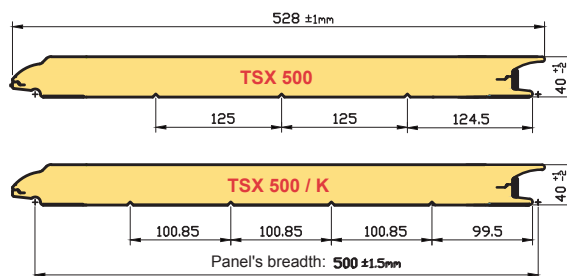





TSX 500
RAL 9010- WOODGRAIN



Panel Weight:		
WG	P25 & P5	4.60 Kg/m
POLY	POLY 25	5.00 Kg/m
WG SM	P45 & P35 SAND	4.85 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$k \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

40 mm

Panel weight is for indication purposes only.
Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecse^{do} recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*						* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN													
	5µm Paintable Primer			STANDARD GREY									
	25µm Polyester	STANDARD COLOURS		RAL 8014	RAL 9002	RAL 9010							
		OTHER COLOURS		RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER					
POLYGRAIN													
	25µm Polyammidic				RAL 7016	RAL 9016							
SANDGRAIN													
	35µm Super Polyester Wrinkled				RAL 7016								
SMOOTH													
	45 µm Super Polyester Multilayer HD+				V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS		25µm Polyester										
				RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth			

TSX 555
TSX/K 555


TECSEDO® SAFE eXtra

TSX/K 555
RAL 7016 - POLYGRAIN

TSX 555
RAL 9010 - WOODGRAIN





Panel Weight:		
ST	P25	5.03 Kg/m
WG	P25	5.03 Kg/m
POLY	POLY 25	5.45 Kg/m
WG	P35	4.75 Kg/m
LI	P35	5.30 Kg/m
Weight Tolerance		±5%
Ridges (Standard)		125 mm
Ridges (K Version)		100 mm
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$K \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		

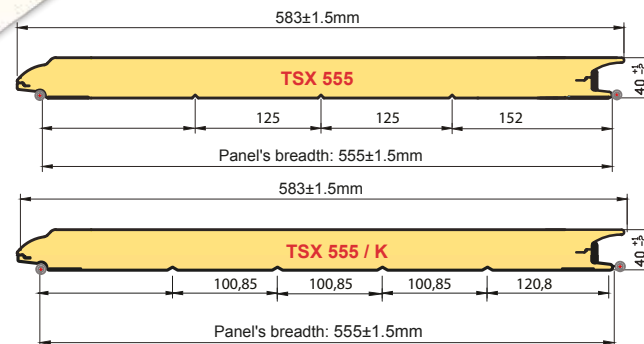



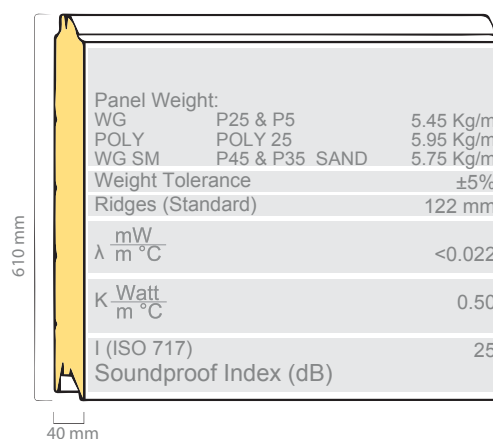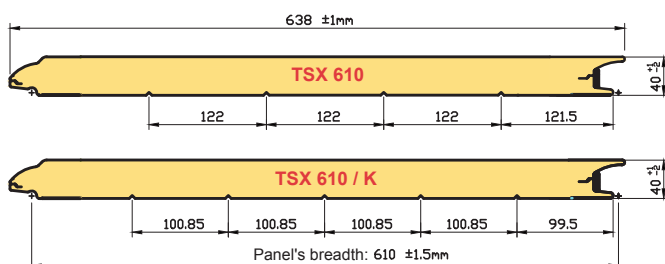





TSX/K 610
RAL 7016 - POLYGRAIN

TSX 610
RAL 9002- WOODGRAIN



Panel weight is for indication purposes only.

Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face		COATING External Face		TYPE External Face		COLOURS*					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
WOODGRAIN												
	5µm Paintable Primer			STANDARD GREY								
	25µm Polyester	STANDARD COLOURS		RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS		RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
POLYGRAIN												
	25µm Polyammidic			RAL 7016	RAL 9016							
SANDGRAIN												
	35µm Super Polyester Wrinkled			RAL 7016								
SMOOTH												
	45 µm Super Polyester Multilayer HD+			V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS		25µm Polyester			 RAL 9002 Stucco		 RAL 9010 Stucco		 RAL 9002 Smooth		 RAL 9010 Smooth