




TSV/K 500
V-DARK - WOODGRAIN

TSV 500
RAL 9006- WOODGRAIN

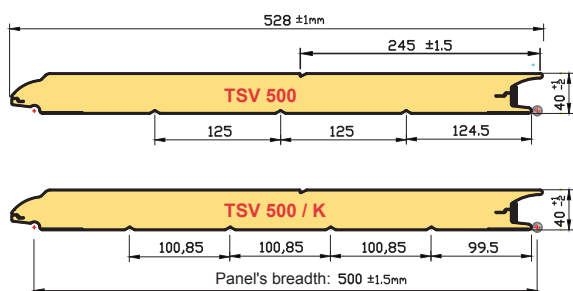

500 mm	Panel Weight:		
	WG	P25 & P5	4.60 Kg/m
	POLY	POLY 25	5.00 Kg/m
	WG SM	P45 & P35 SAND	4.85 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	Ridges (K Version)		100 mm
	$\lambda \frac{mW}{m^{\circ}C}$		<0.022
	$k \frac{Watt}{m^{\circ}C}$		0.50
	I (ISO 717) Soundproof Index (dB)		25

40 mm

Panel weight is for indication purposes only. Due to the typical tolerances gotten during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face								
WOODGRAIN											
	5µm Paintable Primer		STANDARD COLOURS								
	25µm Polyester		RAL 8014	RAL 9002	RAL 9010						
		OTHER COLOURS	RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER					
POLYGRAIN											
	25µm Polyammidic		RAL 7016	RAL 9016							
SANDGRAIN											
	35µm Super Polyester Wrinkled		RAL 7016								
SMOOTH											
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER				
INTERNAL FACE	COLOURS		25µm Polyester		RAL 9002 Stucco		RAL 9010 Stucco		RAL 9002 Smooth		RAL 9010 Smooth